

OBLIX™

New

Extra-strong uncovered braid made of Oblix.

Uncovered and impregnated braid ideal for rips, binding, halyards on hydraulic cylinder, rigging, winches, dinghy haulage and other static or dynamic uses.

Very easy to splice.

Made of 12-strand OBLIX™ yarn, it compares the same breaking loads of Dyneema braids also featuring extremely good abrasion and UV-ray resistance.


Teflon EcoElite™ finish to make the braid water repellent.



Grey	Red	Ø mm	Breaking load kg	m
06.462.04	06.463.04	4	1450	100
06.462.05	06.463.05	5	2200	100
06.462.06	06.463.06	6	3200	100
06.462.08	06.463.08	8	5800	100

Floating levilene braid

High strength, reduced elongation, easy to handle. Sold in reels.



White	Orange	White-orange	Grey	Lime (fluo color)	Black	Ø mm	Breaking load kg	m
06.445.06BI	06.445.06AR	-	-	-	06.445.06NE	6	200	200
-	-	06.445.07BA	-	06.445.07LI	-	7.5	300	200
06.445.08BI	06.445.08AR	-	-	-	06.445.08NE	8	350	200
06.445.10BI	06.445.10AR	-	-	-	06.445.10NE	10	600	200
06.445.12BI	06.445.12AR	-	06.449.12	-	06.445.12NE	12	800	200
06.445.14BI	-	-	06.449.14	-	-	14	900	130
-	-	-	-	-	06.445.14NE	14	900	150
06.445.16BI	-	-	-	-	06.445.16NE	16	1000	100


Mooring lines and fenders

High-strength 3-strand polyester line

ALTA TENACITÀ / HIGH-STRENGTH

Double-torsion 3-strand line. This line doesn't float. Sold in reels.

White		Blue		Grey		Black		Ø mm	m
White	Breaking load kg	Blue	Grey	Black	Breaking load kg				
06.440.06	530	06.453.06	-	06.450.06	430	6	200		
06.440.08	900	06.453.08	-	06.450.08	700	8	200		
06.440.10	1300	06.453.10	06.454.10	06.450.10	1100	10	200		
06.440.12	2000	06.453.12	06.454.12	06.450.12	1600	12	200		
06.440.14	2700	06.453.14	06.454.14	06.450.14	2150	14	100		
06.440.16	3600	06.453.16	06.454.16	06.450.16	3000	16	100		
06.440.18	4700	06.453.18	-	06.450.18	3850	18	100		
06.440.20	5200	06.453.20	-	06.450.20	4200	20	100		
06.440.22	5800	06.453.22	-	06.450.22	4700	22	100		
06.440.24	6750	06.453.24	-	06.450.24	5500	24	100		
06.440.28	7800	06.453.28	-	06.450.28	7000	28	100		
06.440.32	8700	06.453.32	-	06.450.32	9100	32	100		
06.440.36	11100	-	-	06.450.36	10600	36	100		
06.440.40	13500	-	-	06.450.40	14000	40	100		

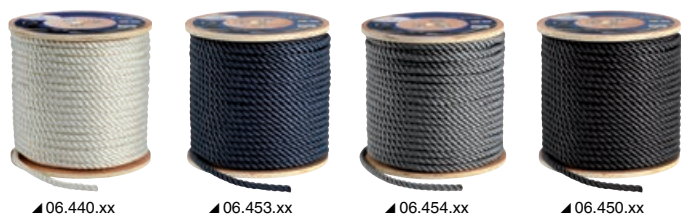

Marlow®

MARLOW mooring lines

ORMEGGIO DOCKING

High-strength 3-strand polyester.



White	Blue	Black	Ø mm	Breaking load kg	m
06.472.06	06.484.06	06.482.06	6	951	200
06.472.08	06.484.08	06.482.08	8	1465	200
06.472.10	06.484.10	06.482.10	10	2570	200
06.472.12	06.484.12	06.482.12	12	3170	200
06.472.14	06.484.14	06.482.14	14	3930	100
06.472.16	06.484.16	06.482.16	16	4766	100
06.472.18	06.484.18	06.482.18	18	6600	100
06.472.20	06.484.20	06.482.20	20	9230	100
06.472.24	06.484.24	06.482.24	24	11210	100
06.472.28	06.484.28	06.482.28	28	14640	100