

OSCULATI



Lift and turn flush pull latch with compression system

AISI 316



COMPRESSION SYSTEM

REGISTERED DESIGN /
DISEGNO DEPOSITATO

Smooth pull catch system, with the same features of similar products but smoother and more practical to use. Cam system mechanism that compresses the locker/cabinet when closed and releases the pressure when the handle is lifted. Totally watertight.

Code	Lock	External Ø mm	Bulkhead hole Ø mm	For thickness mm	
				min	max
38.159.01	no	82	68	5.5	45
38.159.02	yes	82	68	5.5	45



Emergency open from inside

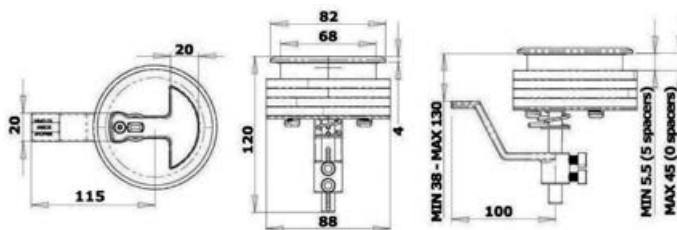

Spare cams/levers for pull latches

Their different shapes easily fit multiple hatches or applications.

Code	Standard on model
38.159.80	38.159.01; 38.159.02; 38.152.01; 38.152.02
38.159.81	38.159.01; 38.159.02; 38.152.60; 38.152.61



Door-stoppers

Jointed door stopper hook



Made of **chromed brass**, double joint.

Code	Length mm
38.192.79	60
38.192.80	80
38.192.81	100

Hooks



Made of **chromed brass**, door stoppers.

Code	Length mm
38.174.60	60
38.174.80	80
38.174.10	100

Doorstop hook

AISI 316

Made of **AISI 316 stainless steel** USA model.



Code	Length mm
38.173.10	100
38.173.75	75