

Floating rescue lights

STAR 1 floating rescue light with automatic tilt switching



Code	Power supply	↔ mm
30.584.00	4 x LR20 1.5 V batteries	350x120

Bracket for floating rescue lights



Made of **stainless steel**, for bulkhead mounting or for mounting on lifebuoy bracket 22.418.00/01.

Code	Compatible FRL	Tube Ø mm
30.584.01	30.584.00 and similar	22/25
30.582.01	30.582.00 -	22/25

OSCULATI




Mini One LED floating rescue light

LED

Last-generation compact LED floating rescue light. MED approval. To be used both on cargo and pleasure boats. Automatic tilt switching. Fitted with safety rotating switch to be activated before commissioning.

Code	Power	Mounting bracket
30.583.00	2 x AA batteries	Included



Starled floating rescue light

LED

Floating rescue light with automatic tilt switching and LED light source. MED type-testing.

Code	Batteries	Use	↔ mm
30.582.00	4 x AA	Pleasure + merchant navy	145x105

It can be installed instead of item 30.584.00 since the body has the same diameter.




KTR LED floating rescue light with automatic tilt switching

LED

Powered by 4 alkaline AA batteries **included**. Fitted with tilt switching to be activated before using the device. Snap bracket for bulkhead mounting included. Type-approved by MED. For commercial and pleasure boating conforming to Ministerial Decree 385 dated 29/9/99.

To combine with stainless steel plate 37.260.83 + clamp 37.175.8 to hook it vertically on the stanchion or pulpit.

Code	Ø mm	Height mm	kg
30.585.00	110	135	0.160

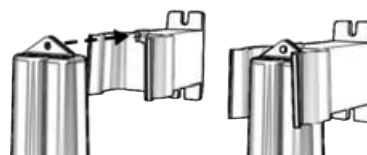

Sealux electronic floating rescue light

30.432.00 Type-tested by RINA in compliance with the CCE 39829 standards. It automatically activates when it comes into contact with water. It does not activate if wet with rain. For pleasure boating (Ministerial Decree 385/99).