

## Bilge pump switches



**OSCULATI**



### Automatic switch for bilge pumps

20-amp flow. Technopolymer body. Removable for cleaning.

Code	V	Max current draw A		Activation level mm	Deactivation level mm
		12V	24V		
16.603.50	12/24	20	10	51	19



**OSCULATI**



### Eco-friendly automatic switch for any bilge pump

Extra-flat version. CE certified in compliance with Law 94/25, ISO 28846 standards.

Code	Voltage	Max A
16.603.00	universal	14




**OSCULATI**



### Openable cover for bilge pump automatic switches

It protects against accidental impacts and avoids it from getting jammed due to debris floating in the bilge.

Code	mm	For switches
16.603.10	180x110x110 h	16.603.00

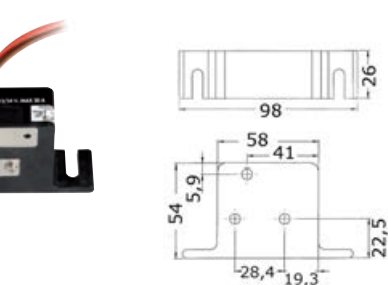

### Automatic electronic switch for bilge pumps

For any submersible pump operating at 20A max current draw and 12/24V. It works in fresh and salt water. It switches on at a 50-mm level and turns off at a 20-mm level. A 5-second return system prevents false starts. Oil- and hydrocarbon-resistant. RINA ISO 8846 type-approved.

Code	ON/OFF level mm	V	Max A	mm
16.610.00	50/20	12/24	20	86x54x26h