




Device for mounting single cable steering gears

45.147.00 Device designed for mounting single cable steering gears on motorized dinghies with outboard engines that are not made-ready to house single cables onto the boat's steering; this device avoids having to mount the steering gear cable onto the dinghy's transom; universal model, made of **anodized aluminium**, fitted with a plate model 47.763.92 + adjusting clamp + steering gear mounting pipe + small screw-in nylon bushings.

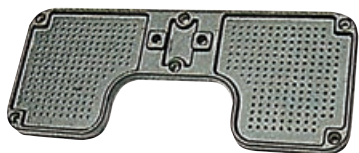


Transom protective plate

Made of **aluminium**.

Code	mm
47.763.92	260x110

Coupling bars

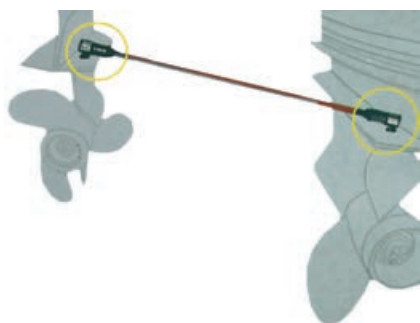


Coupling rod


45.560.00 Stainless steel with ball terminal joints, used to connect the main engine with an auxiliary one; the auxiliary steering can be handled with the boat steering system. Adjustable length **from 45 to 60cm**, easy to remove thanks to its spring ball fitting.

Outboard tiller extensions

OSCULATI



▲ 45.156.05

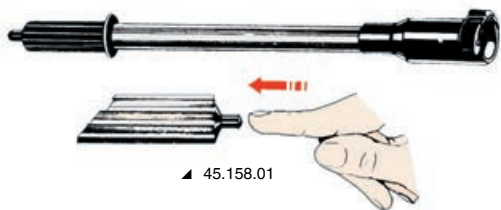


▲ 45.158.01

Snap extension rod for outboard engines

Version fitted with **patented snap-in locking system**; universal model, anodized **aluminium** pipe, rubber hand grip and nylon lock.

Code	Version	Length cm
45.156.05	standard	60
45.158.01	with ground push button included in the handle	60
45.159.00	telescopic	55/95

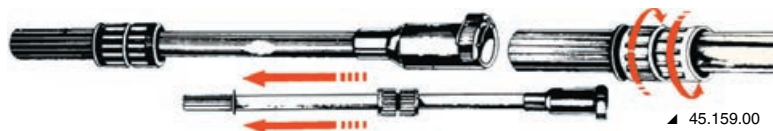

▲ 45.159.00



▲ 45.155.80/81



▲ 45.155.86

Extension rod for outboard engine steering

Wing nut mounting. Universal model made of anodized aluminium, equipped with knob and nylon locking system.

Code	Version	Length cm
45.155.80	Fixed	66
45.155.81	Fixed	76
45.155.86	Telescopic	61 / 100