

Night Eye and Night Eye LED high-beam light with pulpit coupling

Features:

- ABS with anodized aluminium bracket and stainless steel base.
- WAGNER optical bulb.
- Full 360° rotation and elevation joint, frictioning.
- Detachable light with 2-m extension cable.
- Watertight switch, fitted with rubber cover, integrated into the rear dome.
- Equipped with watertight plug for recess or flat mounting.




Features:

- Weather resistant.
- Vacuum-sealed optic bulb, humidity- and salt-resistant.
- Great power.
- Light weight, low cost.

OSCOLATI



Code	Version	Beam type	V	W	Lumen	Beam		For pipes mm	Beam dimensions		Spare bulb
						FLOOD m	SPOT m		h mm	Ø mm	
13.239.00	Halogen	SPOT- FLOOD	12	100+100	-	100	400	22/25	250	215	13.116.00 (12 V)
13.241.02	LED	SPOT- FLOOD	12/24	24	2600	100	600	22/25	250	215	13.241.03

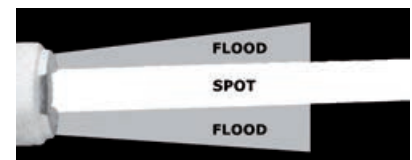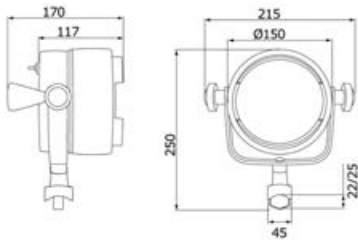

Moonlight LED high-beam light


LED

Adjustable LED high-beam light with mirror-polished stainless steel swivelling handle and joint.

Features:

- Adjustable in height and 360° rotation.
- White PMA base plate for flat mounting.
- two knobs adjust the joint and lock it to the base plate.
- watertight ON-OFF switch;
- spiral cord extensible up to 2 m and fitted with lighter plug.

Code	Body	V	W	Lumen	K	LED beam angle	No. of LEDs	mm
13.210.00	White ABS + SS inox	12/24	36	3000	6000	50°	12	148x254x122



OSCOLATI



Articulating, Portable Spotlight

LED

IP66

Reinforced Nylon frame with stainless steel base. Can be easily detached from base for maximum flexibility. Extendable spiral electric cable with cigarette lighter plug. Rocker switch. Supplied with 7 x 3W LED12/24 V LEDs.

Code	V	W	Switch	Lumen	K	LED beam angle	No of LEDs
13.235.10	12/24	21	Yes	2000	5000-6500	50°	7 x 3 W

