


Single lever control B89/B90

Universal model, designed for side wall mounting either right of left, recommended for outboard and inboard engines fitted with hydraulic inverter.
Compact size, can be fitted into any type of boat, equipped with idle lever locking system, sold with **universal Kit**, uses all types of cables except for C4 and C22.
The kit K35 is required if cables C5 and C16 are used.

Code	Type	Color
45.452.02BI	B89	Ivory
45.452.02NE	B90	Black

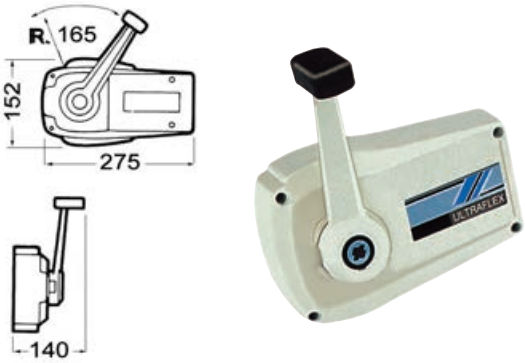

Low-profile bulkhead single-lever control

Double action: gas + inverter: Modern and simple **smooth low profile** design, making it ideal for sailing boats. Front panel with lever made of AISI 316 stainless steel.
Equipped with adjustable clutch. Availability of X41 safety switch to prevent engine ignition when the lever is not in idle position.
Matching cables: C2/C8/MACH"0".

Code	Type	Version
45.452.20	B400	Mechanical (both gas and inverter)

45.452.22 X41 safety switch




Single lever control for recess wall mounting

Any cable may be used (except C22/C36/MACH 36).
With cables C5 and C16/MACH 5 kit 35 is required.
Suitable for any type of engine.

Code	Version	Abbreviation
45.452.04	with neutral lock	B183
45.452.05	with neutral lock and Trim switch	B184
45.452.06	sailboat version	B85
45.452.08	with neutral lock and Trim switch, black knob	B310B
45.452.09	with neutral lock and Trim switch, brier knob	B310BR


OPTIONAL Safety microswitch 45.012.00

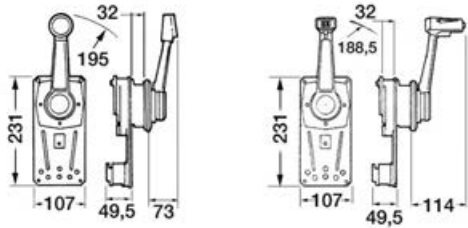

Universal single lever box ULTRAFLEX B65/B77

Chrome or lacquered body, chromed lever. Uses cables C2/C7/C8/C14, with kit K35 you can also use cables C5/C16.

Code	Color	Trim control	Model
45.252.00	Painted	-	B73
45.252.02	Painted	x	B77



Microswitch X 12

45.012.00 It can be fitted in all Ultraflex boxes (except B47/B400), because this does not enable the ignition unless the engine is neutral. 2 switches are needed in case of twin levers.

