

## OSCULATI



▲ 13.257.12-24





▲ 13.256.12-24



### Transom light made by white ABS, 100% watertight

Fitted with Sealed Beam bulb 14.249.07/08. To be mounted under the platform to illuminate the water surface; supplied with 1.20 m power cable.

Code	Version	Type	Base Ø mm	Size mm
13.256.12	inclined	12 V - 35 W	170	90
13.256.24	inclined	24 V - 50 W	170	90
13.257.12	straight	12 V - 35 W	170	90
13.257.24	straight	24 V - 50 W	170	90



## OSCULATI

### Underwater LED light for ladders

#### PATENT

Little interlocking light for telescopic ladders. Automatic switching when getting in touch with water. 100-h life sealed battery. Sold in 2-pc display package.

Available for both Standard step ladders (38 mm) and for Extra-large step ladders (57 mm and up). Pressure mounting on the highest step, they take no room at all.





▲ 13.266.01



▲ 13.265.01

Code	Version	Light colour	Life h	Package pcs
13.265.01	Light for Standard 38-mm step ladder	Blue	100	2
13.266.01	Light for Extra-large 57-mm double step ladder	Blue	100	2



### Underwater LED light

#### IP68

Mirror-polished AISI316 stainless steel body. **Attention:** it shall be installed under water due to the high temperature generated during operation.

Code	V	W	Lumen	K	LED beam angle	No of LEDs	LED colour
13.640.01	10/30	3.6	343	5700	108°	27	White
13.640.02	10/30	3.6	74	5700	108°	27	Blue
13.640.03*	12	1.2	95/67/10/12**	2800-3200	120°	18	- RGBW

\* Press repeatedly the ON-OFF switch to select the colour of the LED light (white/green/blue/red).


\*\* Lumen white 95, green 67, blue 10, red 12



▲ 13.640.01



▲ 13.640.02

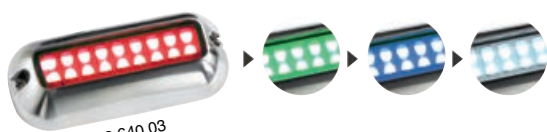

▲ 13.640.03

