

**Inspection hatch**

Fitted with plug vent, drain plug and 12-mm Ø hose adaptor.  
17-19-mm Ø vent. Blind flange for meters.

Code	For	Hose adaptor mm	Cap
52.740.00	52.033.XX	8	3/8"

**Inspection trapdoor for diesel tanks**

In compliance with ISO 21487 for PA6 nylon material. Fitted with gaskets.

Code	Bore Ø mm	Outer Ø mm	Weight g
52.035.00	120	180	209

**Mechanical level indicator**

Code	for tanks with height mm	Suitable for tanks
52.037.00	H30	52.033.01; 52.033.02; 52.033.03; 52.033.09; 52.033.10
52.037.01	H23	52.033.04; 52.033.05; 52.033.06
52.037.02	H28	52.033.21; 52.033.22; 52.033.23
52.037.03	H40/41	52.033.07; 52.033.08; 52.033.24; 52.033.25; 52.033.26

**Mechanical fuel gauge**

Fitted with gasket and mounting screws. External flange-Ø 66.5 mm

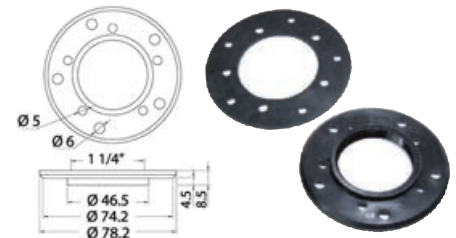
Code	Float rod length mm
52.742.04	220
52.742.03	265
52.742.02	285
52.742.05	370

**Cap for flange**

52.746.00 For tanks fitted with international 5-hole flange.

**Level sensor seal**

52.746.01 For tanks fitted with international 5-hole flange. To be used with plug 52.746.00.

**Mounting flange for level sensors from S5 to S3**

52.746.10 Useful to install S3 thread sensors on tanks ready to fit 5-bore flange (S5).

**Universal outlet kit**

It includes No 1 straight threaded joint + No 1 38-50-60-mm Ø 90° threaded elbow + No 2 seals. 1" 1/2 thread.

Code	For tank models
52.036.00	52.033.../52.730.../52.731.../52.732.../52.733...

**Four bracket set**

Code	Description
52.038.04	Made of <b>plastic</b> , includes 2.4-m <b>polypropylene</b> straps + tank locking buckle, fenders and others, <b>universal</b> model.

**Anti-smell filter**

Active carbon filter for fuel tank draining.

Code	Description	Hose adaptor mm	Length mm
50.136.00	complete filter	16	110 x 120
50.136.02	spare filtering element	-	-

**Additional brass suction pipe for fuel tanks petrol / diesel**

Suction pipe for tanks 52.035.xx, 52.036.xx and similar. 3/8" female thread.  
Max length 550, cut to length on request.

Code	Description
52.035.95	With 3/8" male thread
52.035.96	3 pivoting o-rings. For tanks fitted with 1/2" male suction outlet.

