


Hatches, housings and lockers type-tested in compliance with Directive 2013/53/UE

OSCULATI

FLUSH inspection hatch CE

The faired cover hides the frame completely. 100% flush hinges. **180° opening**. Walking surface. UV BASF resistant. It can be installed on any sports craft, boat design category A, B, C, and D, area II a, III, IV, watertightness degree 2.

White	Cream RAL 9001	Black	Grey RAL 7042	Outside mm	Inside mm	Cut mm	OPTIONAL lock kit
20.291.00	20.291.40	20.291.50	20.291.60	380x280	295x198	310x210	20.093.00
20.292.00	20.292.40	20.292.50	20.292.60	600x350	513x265	530x280	20.093.00
20.293.00	20.293.40	20.293.50	20.293.60	375x375	285x285	300x300	20.093.00
20.294.00	20.294.40	20.294.50	20.294.60	520x465	430x375	445x390	20.093.00
20.295.00	-	20.295.50	20.295.60	600x250	515x165	530x180	20.093.00

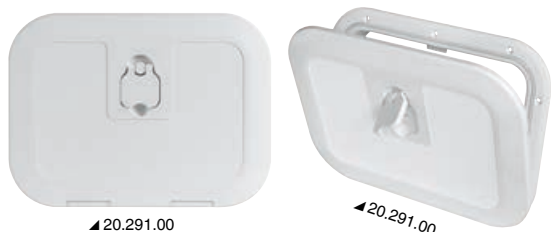

▲ 20.291.00

▲ 20.291.00



▲ 20.292.00



▲ 20.293.00



▲ 20.294.00




▲ 20.291.40



▲ 20.291.60



▲ 20.291.50



▲ 20.295.00

CE APPROVED
based on
UNI EN ISO 12216:2004

OSCULATI

Faired inspection hatch with hidden screws

180° opening, very sturdy, antiskid finish, interchangeable sizes with product numbers 20.301.00-20.302.00.

Code	Outside mm	Inside mm	Cut mm	OPTIONAL lock kit for ready installation
20.298.00	280x380	198x295	210x310	20.093.00
20.299.00	350x600	265x513	280x530	20.093.00



▲ 20.299.00


 ▲ 20.093.00 Ready installation
lock kit OPTIONAL


▲ 20.298.00



▲ 20.298.00

OSCULATI

Inspection hatch with very sturdy anti-slip walking surface, UNI EN ISO 12216:2004

Splash-proof cover locking with neoprene gasket. Flush-mount. It may be used as hatch for lockers, fishing tanks, storeroom hatch and bulkhead hatch. **160° opening**.

It can be installed on any sports craft, boat design category A, B, C, and D, area II a, III, IV, watertightness degree 2.

White	Grey	Outside mm	Inside mm	OPTIONAL lock kit for ready installation
20.301.00	20.301.60	280x380	180x280	20.093.00
20.302.00	20.302.60	345x595	250x500	20.093.00




▲ 20.301.00



▲ 20.301.00



▲ 20.302.00


 ▲ 20.093.00 OPTIONAL lock kit
for ready installation


CE APPROVED
based on
UNI EN ISO 12216:2004