

Nylon control panel

With illuminated rocker switch. Watertight, injection moulded, black colour.

Code	Version	No of switches	max Amp load	Included	glass fuses size mm	mm
14.103.31	vertical	6	10 each	-	6x32	165x114
14.103.32	horizontal	6	10 each	-	6x32	114x165
14.103.34	vertical	4	10 each	-	6x32	127x114
14.103.35	vertical	3 +	10 each	1 horn button + 1 voltmeter	6x32	127x114
14.103.38	vertical	6	10 each	10 Amp automatic fuses	-	165x114



Electrical panels with automatic fuses and double LED.

IP65

Body made of dark grey polycarbonate. Steady green LED lights up the labels indicating the different functions. Red LED switches on when in ON position. Hidden mounting screws. First ON-OFF switch with 2 separate circuits and ON-OFF return switch for models 14.850.05/06.

Code	V	No. of switches	Automatic fuses	Max total Amp	mm
14.850.06	12	6	3x10A + 3x5A	37	165x115
14.850.05	12	5 + (watertight) USB	2x10A + 3x5A	37	165x115
14.850.04	12	4	2x10A + 2x5A	37	124x115




Electric control panel made of aluminium and fitted with grey polycarbonate front panel

Equipped with watertight **rocker switches**, with built-in ON **pilot light**. The first switch has 3 positions ON-OFF-ON with two separate circuits, the last one is a spring switch for the horn. Supplied with automatic watertight fuses (14.845.06: 3 x 10 A, 2 x 15 A, 1 x 20 A; 14.855.07: 4 x 10 A, 2 x 15 A, 1 x 20 A). Protection level IP56. Includes polycarbonate self-adhesive labels, for various functions, in Italian, English and German.

Code	Progressive	Switches	Circuits	mm
14.845.06	vertical	6	7	171x135
14.855.07	horizontal	7	8	207x124



OSCULATI

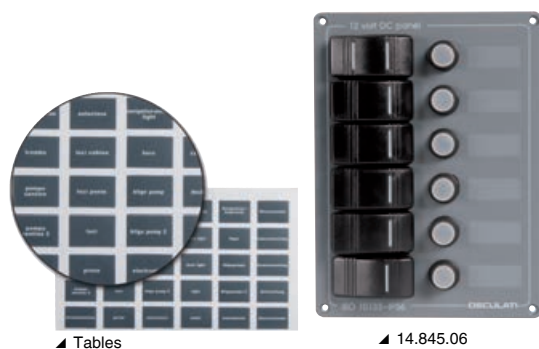

Electric control panel with flush rocker switches

Including switches model 14.196.01 fitted with LEDs which light up in ON position, and resettable **automatic** thermal breakers.

IP65. PCB electronic board **illuminates** the function signs.

Code	Finish	No of switches	Fuses A	mm
14.843.03*	Polished graphite	3	1x5 + 1x10 + 1x15	124x115
14.843.05	Polished graphite	5	2x3 + 1x6 + 1x8 + 1x10	165x115
14.843.09**	Polished graphite	8 + 1 socket/lighter plug	2x5 + 5x10 + 2x15	282x115
14.844.05	Mahogany coated	5	2x5 + 2x10 + 1x15	165x115
14.844.09**	Mahogany coated	8 + 1 socket/lighter plug	2x5 + 5x10 + 2x15	280x115

* First switch ON-OFF-ON with 2 separate circuits

** A spring switch for horn



OSCULATI