

Stainless steel pop-up cleats

Push-up mini-cleat

AISI 316

Ideal for coupling fenders, dinghies or small boats.
Made of **mirror-polished AISI316 stainless steel**.

Code	Base mm	Bore mm	Breaking load kg
40.135.00	89x31	22	2278
40.135.01	134x41	22	3084




Precision-cast push-up cleat

AISI 316

Made of **mirror-polished AISI316 stainless steel**.
Fitted with mounting studs and retainer plate.

Code	Length mm		Width mm	Overhang mm			Stud Ø mm	Breaking load kg
	A	A1	B	D	C	E		
40.136.01	164	150	38	12	60	23	10	2784
40.136.02	217	203	50	15	83	36	10	3094
40.136.03	305	285	70	25	95	52	12 (optional) 40.142.12	4579

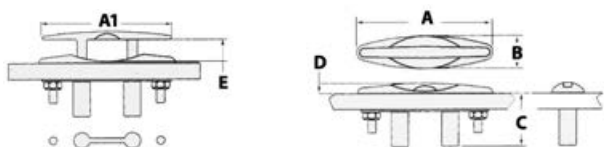


Retract push-up cleat

AISI 316

Made of **mirror-polished AISI316 stainless steel**.

Code	A mm	B mm	C mm	D mm	E mm	F mm	Breaking load kg	OPTIONAL drainer kit
40.136.44	134	110	38	12	65	46	750	40.136.64
40.136.46	185	156	50	18	76	60	1200	40.136.66
40.136.48	220	204	50	-	88	71	1200	40.136.68

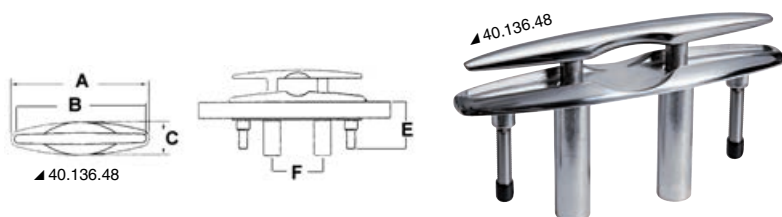

Smart Cleat push-up cleat

AISI 316

Made of **mirror-polished AISI316 stainless steel**. Very compact.

Code	A mm	B mm	C mm	D mm	E mm	F mm	Breaking load kg	OPTIONAL drainer kit
40.136.20	126	21	33	68	11	44	700	40.136.64
40.136.21	155	26	38	75	11	57	1100	40.136.66
40.136.22	203	39	49	85	13	71	1500	40.136.68
40.136.23	260	40	61	103	14	91	1800	40.136.70



Water drain pipe for Retracts/Smart/Ghost cleats

Made of flexible black PVC. For water drainage of bilge cleats

Code	For cleats
40.136.64	40.136.20; 40.136.44; 40.152.16
40.136.66	40.136.21; 40.136.46
40.136.68	40.136.22; 40.136.48; 40.152.24
40.136.70	40.136.23
40.155.72	40.155.16
40.155.74	40.155.24

