


### Heavy Duty fender

White body and blue head. Fitted with inflation/deflation valve. Models OF4/OF6 can also be used as hull hauling rollers. 0.15bar max pressure.

Code	Model	⌀		⊠		PACKAGE
		cm	in	cm	in	
33.212.09	OF1	15	6	61	24	10
33.212.10	OF2	21	8	61	24	10
33.212.11	OF3	21	8	74.5	29	10
33.212.12	OF4	20.2	8	104	41	5
33.212.18	OF5	26.8	11.5	78	30.5	5
33.212.13	OF6	26.8	11.5	109	43	5

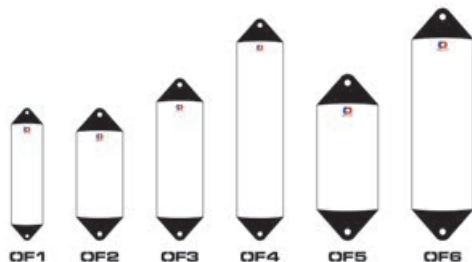

**OSCULATI**



### Heavy Duty fender and buoy

White body and blue head. Fitted with inflation/deflation valve. 0.15bar max pressure.

Code	Model	⌀		⊠		PACKAGE
		cm	in	cm	in	
33.300.12	OA1	30	11.5	38	15	10
33.300.27	OA2	39	15.4	50	19.5	10
33.300.50	OA3	46	18.1	58	22.9	10



**OSCULATI**



**New**

### TFG series fender

Fitted with inflation valve.

Model	Colour	⌀		⊠		kg	PACKAGE
		cm	in	cm	in		
TFG 0	white	9	3 1/2	33	13	0.35	20
TFG 1	white	11	4 1/2	40	16	0.50	10
TFG 2	white	14	5 1/2	50	20	0.85	6
TFG 3	white	16	6 1/2	58	23	1.1	4
TFG 4	white	21	8 1/2	68	27	2	4
TFG 5	white	26	10 1/2	78	30	3	4



**OSCULATI**



### Fenders for inflatables

Made of light grey closed cell EVA foam. Preformed, with 350-mm radius for use on inflatables up to 12 metres. Ideal to protect inflatables from impact against wharves and docks.

Code	⊠ cm	Thickness cm
33.516.01	25x50	2
33.516.02	33x66	2

