


Culver push button

Chromed brass push buttons, fitted with **silver plated** contacts, guaranteed function.

Code	Version	Necl mm
14.918.03	Standard	15x25
14.918.04	Watertight case	15x25

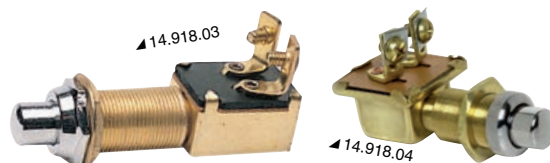

Push button

Made of nylon with chromed brass ring and nut. Fitted with brass contacts and 100% watertight rubber protective cap. Max load 30 A at 12V. Shaft 15x28 mm.

Code	Color
14.910.00NE	 black
14.910.00RO	 red



Thermal toggle switch, resettable model


Fitted with lighted toggle, designed to light electrical panels.

Code	volt	Amp	Panel hole mm	Frame mm
14.732.05	12	5	28x13.5	32.25x16.07
14.732.08	12	8	28x13.5	32.25x16.07
14.732.10	12	10	28x13.5	32.25x16.07
14.732.15	12	15	28x13.5	32.25x16.07




AIRPAX/SENSATA toggle handle hydraulic magnetic circuit breaker with rechargeable automatic fuse

Polo singolo / Toggle & botton




No need of fuses. Designed to stand overloads of up to 50% for a few seconds. They immediately disconnect in case of short circuit and cannot be reactivated until the problem is solved. **Very compact**, similar to traditional circuit breakers.

Code	Body	A	Connectors	Neck Ø mm	Rubber cap	 mm
14.738.05	black polycarbonate	5	Faston	12.7	14.738.00	17x34,9 (front), depth 34
14.738.10	black polycarbonate	10	Faston	12.7	14.738.00	17x34,9 (front), depth 34
14.738.15	black polycarbonate	15	Faston	12.7	14.738.00	17x34,9 (front), depth 34
14.738.20	black polycarbonate	20	Faston	12.7	14.738.00	17x34,9 (front), depth 34

Watertight cover made of rubber for tumbler switches



Code	Description	 ORDER BY BOX
14.738.00	Equipped with brass ring. Couple to 14.738.05/10/15/20	10


AIRPAX/SENSATA toggle handle hydraulic magnetic circuit breaker with rechargeable automatic fuse

Designed on purpose for the marine environment. In case of heavy overload (i.e.: short circuits), the circuit breaker disconnects instantaneously; for overloads up to 50% it maintains the contact for few seconds so, in case it is due to a chance event, it has time to return within the limits without interrupting the power supply. In case of short circuit, the switch cannot be reactivated until the problem is solved.

- **Toggle handle circuit breaker** - Toggle actuator, IAG series, universal 12/220 V, front recess in the panel. 16-mm Ø.

- Flat flush toggle circuit breaker for horizontal or vertical mounting - Flat actuator with flush toggle, coloured light indicator for OFF position. IEGB series, universal 12/220 V, front recess in the panel 32x19-mm

switch with overhanging lever	Flush mount lever switch		Universal power	Power A
	horizontal mounting	vertical mounting		
14.736.05	14.740.05	14.739.05	DC/AC 12/220 V	5
14.736.10	14.740.10	14.739.10	DC/AC 12/220 V	10
14.736.15	14.740.15	14.739.15	DC/AC 12/220 V	15
14.736.20	14.740.20	14.739.20	DC/AC 12/220 V	20
14.736.50	14.740.50	14.739.50	DC/AC 12/220 V	50

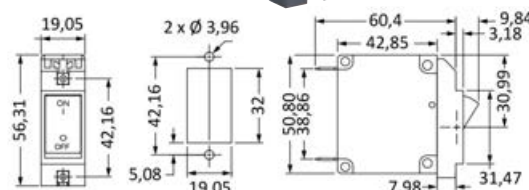

AIRPAX / SENSATA hydraulic/magnetic circuit breaker, 2 poles, AC

For 80V onboard applications.

Code	Universal power	Capacity A	Black frame size mm	Mounting with	Depth mm
14.734.05	DC MAX 80 V	5	19x51	2 screws	41
14.734.10	DC MAX 80 V	10	19x51	2 screws	41
14.734.20	DC MAX 80 V	20	19x51	2 screws	41
14.734.25	DC MAX 80 V	25	19x51	2 screws	41
14.734.30	DC MAX 80 V	30	19x51	2 screws	41

