


LED light bulbs

OSCULATI

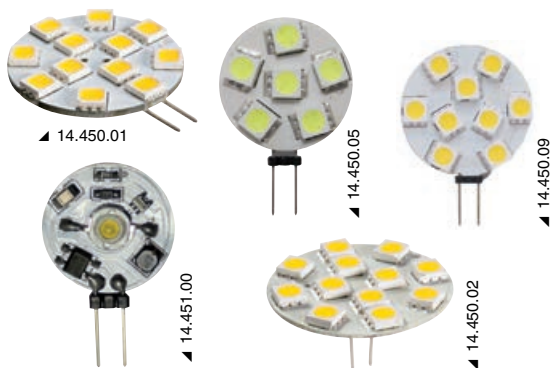

SMD LED bulb, G4 connection

LED

It replaces all G4 connection halogen bulbs

Code	Screw	chip Ø mm	V	W	W equivalent	lumen	K	LED beam angle	No of LEDs	Connection
14.450.01	G4	30	12/24	2	15	200	2700	120°	12	side
14.450.05	G4	24	12/24	1.2	7	120	2700	120°	6	side
14.450.09	G4	28	12/24	1.6	11	160	2700	120°	9	side
14.451.00	G4	24	12/24	1.4	10	90	2700	150°	1 HD	side
14.450.02	G4	30	12/24	2	15	200	2700	120°	12	rear
14.450.06	G4	24	12/24	1.2	7	120	2700	120°	6	rear
14.450.10	G4	28	12/24	1.6	11	160	2700	120°	9	rear



Bicolour SMD LED bulb, G4 screw

LED

Repeatedly press the switch to activate either the white or red/blue light. It perfectly retrofits the existing electric installation.

Code	LED colour	V	Chip Ø mm	W	W equivalent	No of LEDs	Lumen	K	LED beam angle	Connection
14.450.31	white/blue	12	31	1.6/0.8	10/5	16	180/20	3000	120°	side
14.450.32	white/blue	24	31	1.6/0.8	10/5	16	180/20	3000	120°	side
14.450.33	white/red	12	31	1.6/0.7	10/4.5	16	180/25	3000	120°	side
14.450.34	white/red	24	31	1.6/0.7	10/4.5	16	180/25	3000	120°	side



LED light bulb - G4 side screw

LED

Model fitting a single high-power SMD LED bulb.

Code	Screw	V	W	W equivalent	Lumen	K	LED beam angle	Connection	mm
14.450.15	G4	12/24	1.5	15	130	3000	120°	Lateral	33x16



LED light bulb - G4 screw, 360° light

LED

High-power SMD LED version.

Code	Screw	V	W	W equivalent	Lumen	K	LED beam angle	Connection	mm
14.450.18	G4	12	1.6	18	150	3000	360°	In axis	10x38




Festoon LED bulb

LED

Equipped with LED having a 360° light cone.

Code	V	Length mm	LED	Chip	W	lumen	K	Suitable for lights	Package
14.301.20	12	31	4	12	0.7	60	3000	Compact 12 and 11.507.xx	2 pcs
14.300.32	12	36	8	24	1.7	89	3000	General purposes, 36-mm lamp holder centre distance	1 pc
14.301.22	12	38	8	24	1.4	120	3000	Classic 12 / Utility 85 / Utility 77	2 pcs
14.301.24	12	44	12	36	2	180	3000	Maxi 20	2pcs

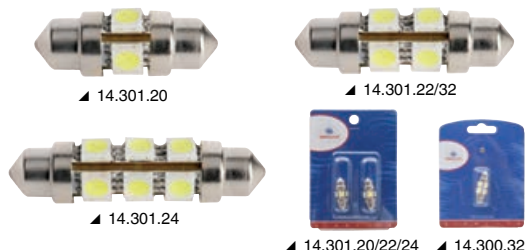

BA15D LED bulb for anchor lights, aligned bayonet pins

LED

It can replace a 10W bulb in anchor lights 11.132.xx, 11.133.xx, and similar.

Code	V	W	W equivalent	lumen	K	LED beam angle	Poles
14.223.00	12/24	1.2	10	100	3000	170°	Parallel



SMD LED bulb for spotlights, BA15D screw

LED

BA15D screw (15-mm bayonet with aligned pins).

Code	V	W	W equivalent	lumen	K	Ø D mm	L mm
14.443.11	12/24	1.5	12	150	2700	16	41
14.443.12	12/24	2.5	20	220	2700	19	43
14.443.13	12/24	3	35	300	2700	20	55

