

Underwater LED light for hull/transom

Underwater installation, only. Made of technopolymer and fitted with high-efficiency LED.
A single 13-mm Ø bore is needed for through deck power cable.

| Code | Finish | V | W | Lumen | K | LED beam angle | No of LEDs | LED colour | mm |
|-----------|--|-------|----|-------|------|----------------|------------|------------|-----------|
| 13.276.01 | Technopolymer | 12/24 | 10 | 998 | 5700 | 30° | 3 | White | 102x54x15 |
| 13.276.02 | Technopolymer | 12/24 | 10 | 142 | - | 30° | 3 | Blue | 102x54x15 |
| 13.276.10 | Technopolymer + polished AISI316 SS body | 12/24 | 10 | 998 | 5700 | 30° | 3 | White | 102x54x15 |
| 13.276.12 | Technopolymer + polished AISI316 SS body | 12/24 | 10 | 142 | - | 30° | 3 | Blue | 102x54x15 |




OSCULATI



▲ 13.276.01/02



▲ 13.276.10/12

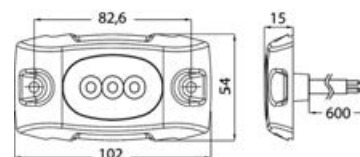


Underwater LED light for gangplanks / upper stern / bottom

Made of mirror-polished AISI 316 stainless steel, it is equipped with **high-power Led lights**. It can be installed both **above** or **under** water since it is totally watertight.

| Code | V | Lumen | K | LED beam angle | LED | LED Colour |
|------------|-------|--------------|------|----------------|-------|------------|
| 13.272.00 | 12/24 | 600 | 6000 | 25° | 2x5 W | White |
| 13.272.01 | 12/24 | 90 | - | 25° | 2x5 W | Blue |
| 13.272.02* | 12/24 | 600/90/90/90 | - | 25° | 4 W | - RGBW |

* Press the ON-OFF button repeatedly to select the LED colour LED (white - blue - red - green)



OSCULATI





Underwater LED light for gangplanks, upper sterns and bottoms

IP68

AISI 316

Body made of polished AISI 317L stainless steel equipped with CREE LED lights. It can be mounted both **above** and **under** water.

| Code | V | Lumen | K | Lux at 1 m | LED beam angle | LED | LED colour | mm | | | |
|-----------|-------|-------|------|------------|----------------|-------|------------|-----|-----|----|----|
| | | | | | | | | A | B | C | D |
| 13.280.96 | 12/24 | 500 | 6000 | 6700 | 10° | 2x3 W | White | 107 | 92 | 50 | 25 |
| 13.280.98 | 12/24 | 150 | - | 6700 | 10° | 2x3 W | Blue | 107 | 92 | 50 | 25 |
| 13.281.00 | 12/24 | 1000 | 6000 | 13400 | 10° | 4x3 W | White | 152 | 137 | 50 | 25 |
| 13.281.01 | 12/24 | 400 | - | 13400 | 10° | 4x3 W | Blue | 152 | 137 | 50 | 25 |
| 13.281.02 | 12/24 | 400 | - | 13400 | 10° | 4x3 W | - RGBW | 152 | 137 | 50 | 25 |
| 13.281.05 | 12/24 | 1500 | 6000 | 20000 | 10° | 6x3 W | White | 195 | 180 | 50 | 25 |
| 13.281.06 | 12/24 | 450 | - | 20000 | 10° | 6x3 W | Blue | 195 | 180 | 50 | 25 |



OSCULATI



▲ 13.280.98



▲ 13.281.00



▲ 13.281.01-02



▲ 13.281.06