


Plastic walkway and courtesy lights

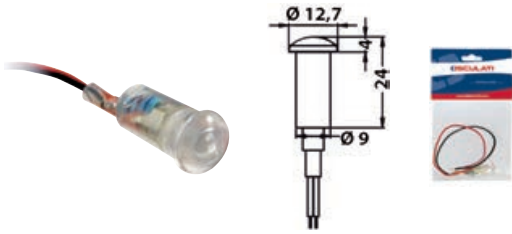

LED walkway light for recess mounting - frontal orientation

Clear plastic.


Code	V	W	K	LED beam angle	Light colour	↔ mm	
						recess Ø	outer Ø
13.183.15	12	0.24	2850/3200	30°	White	9	12.7
13.183.16	12	0.24	-	30°	Blue	9	12.7



LED courtesy light for recess mounting - frontal orientation

IP66 ABS.


Code	V	W	Lumen	K	LED beam angle	No of LEDs	Light colour	↔ mm	
								recess Ø	outer Ø
13.183.08	12	0.24	4	2900-3200	30°	1	White	14x20 depth	28

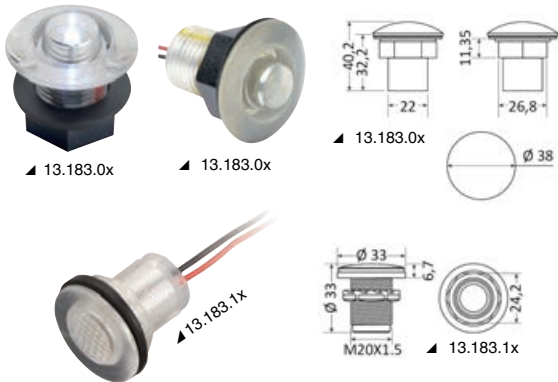

LED courtesy light for recess mounting - frontal orientation

IP68 Clear polycarbonate.


Code	V	W	Lumen	K	LED beam angle	No of LEDs	Light colour	↔ mm		
								recess Ø	outside Ø	overhang
13.183.01	12	0.2	12.5	5500-6300	120°	1	white	22	38	8
13.183.02	12	0.2	2	-	120°	1	red	22	38	8
13.183.03	12	0.2	2	-	120°	1	blue	22	38	8
13.183.11	12	0.2	12.5	5500-6300	120°	1	white	20	31.6	5
13.183.13	12	0.2	2	-	120°	1	blue	20	31.6	5

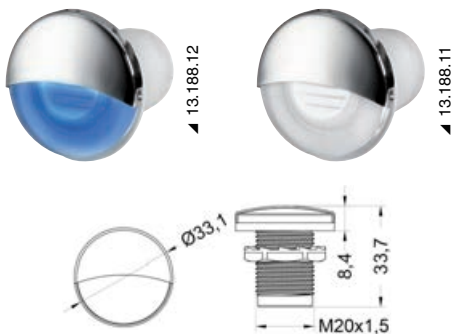

Recess fit LED courtesy light - downward orientation

IP68 Made of technopolymer with polished AISI316 stainless steel cover.

Code	V	W	Lumen	K	LED beam angle	No of LEDs	Light colour	↔ mm		
								recess Ø	outer Ø	overhang
13.188.11	12	0.4	21	5500	120°	2	White	19.2	Ø 33,1	6
13.188.12	12	0.4	4	-	120°	2	Blue	19.2	Ø 33,1	6

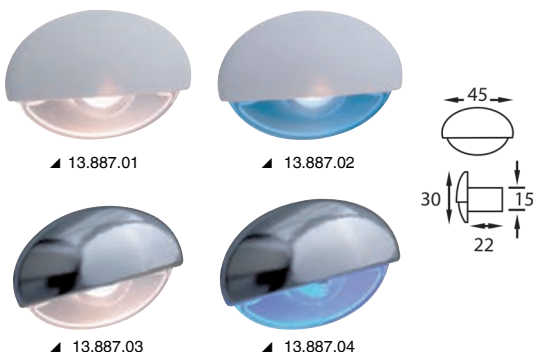

BATSYSTEM Steeplight LED courtesy light for recess mounting - downward orientation

IP65 White plastic and opal glass.

Body colour		V	W	Lumen	K	No of LEDs	Light colour	↔ mm		
white	chromed							recess Ø	outside	overhang
13.887.01	13.887.03	12	0.15	10	3000	1	White	15	30x45	7
13.887.02	13.887.04	12	3	3	-	1	Blue	15	30x45	7