




U-bolts

OSCULATI

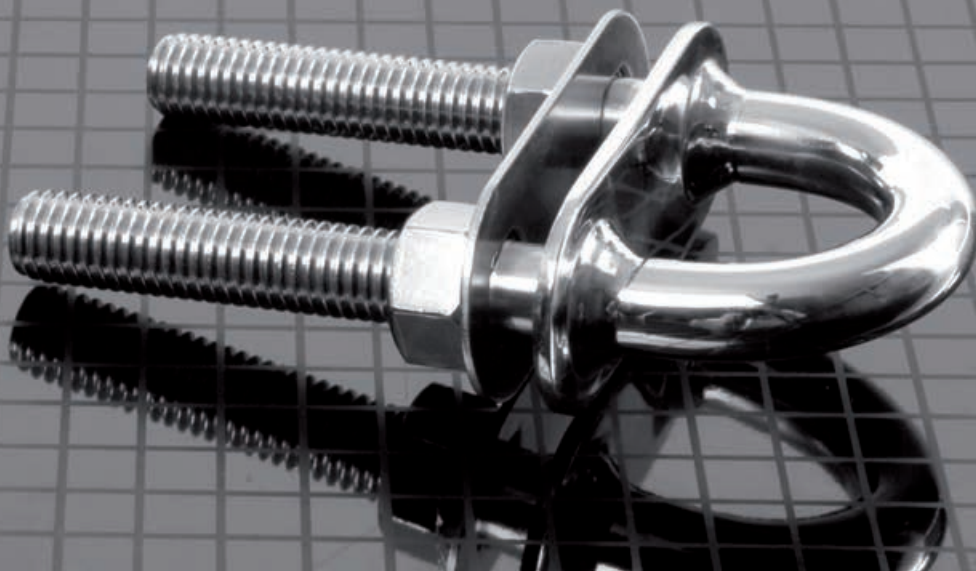


▲ 39.840.00



▲ 39.840.01



▲ 39.840.10




Rapid Lock system for fenders and bimini tops

AISI 316

FLUSH

Quick coupling/release system for fast fastening of fenders, Bimini tops, etc. Made of AISI316 stainless steel. When not in use, the recess base is flush with the surface. Fitted with Dyneema ring for fastening to the fender/Bimini top.

Code	Description	mm
39.840.00	Base Rapid Lock	Ø 33 x 53 h
39.840.01	Removable part	Ø 39 x 30 h
39.840.10	Dyneema ring	Ø 7

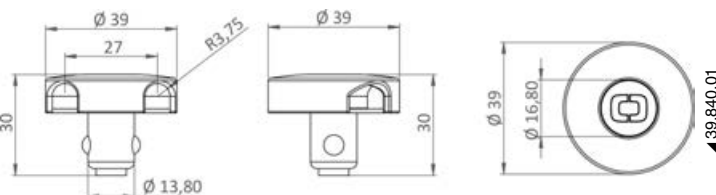

OSCULATI




U-bolt with two plates

AISI 316

Made of stainless steel.

Code	Length mm	Plate mm	Thread length mm	U Ø mm	Thread Ø mm	Centre distance mm	ORDER BY BOX
39.125.07	80	45x13	40	6	5	35	5
39.125.06	90	45x13	45	8	6	35	5
39.125.01	105	50x15	60	10	8	35	5
39.125.02	105	75x40	60	10	8	35	5
39.125.03	110	60x15	65	10	8	45	5
39.125.04	110	80x40	65	10	8	45	5
39.125.00	135	70x20	75	12	10	50	-
39.125.05	155	100x27	95	14	12	65	-

OSCULATI



De Luxe U-bolt for conic fittings.

AISI 304

Made of mirror-polished stainless steel.

Code	D mm	L1 mm	L2 mm	L3 mm	B mm	C mm	Breaking load kg
39.127.01	9.5	100	63	27.5	26.1	35.7	7826
39.127.02	9.5	120	83	27.5	26.1	35.7	7826
39.127.03	9.5	110	63.5	35	26.1	35.7	7826
39.127.05	12.5	122	76	34	34	46	9000
39.127.06	12.5	136	90	34	34	46	9000
39.127.07	12.5	131	76.2	41	34	46	9000
39.127.09	15.8	160	91	69	47.5	60	11000