


**CARLING SWITCH bezel for switches**

Plastic bezels designed to create a single panel with Carling switches and similar.

Version	white	black
Frame for just one switch	14.197.63	14.197.03
Central insert	14.197.61	14.197.01
terminal insert right/left	14.197.62	14.197.02
frame closing plug	14.197.64	14.197.04

**CARLINGSWITCH**

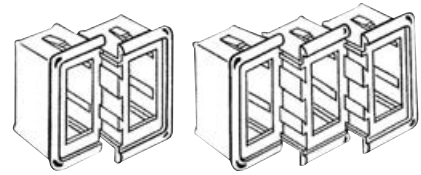


**CARLING SWITCH Contura rocker switch**

IP56 water-proof; installation requires a 21X37 mm hole; maximum capacity of 20 Amp at 12 volt; models fitted with **light symbol**.

Code	Operation	V	No. of terminals	Rocker
14.194.40	OFF-ON	12	2	INCLUDED
14.194.50	OFF-(ON) for horn, etc.	12	2	INCLUDED
14.195.50	(ON)-OFF-(ON) for flaps, etc.	12	7	INCLUDED

**CARLINGSWITCH**

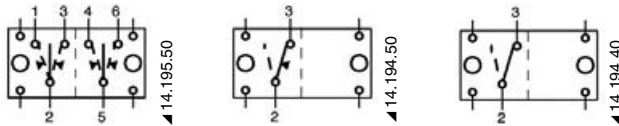

**Dual USB port current plug**

It matches any CARLINGSWITCH, Marina R and Marina TOP switch. It fits all types of frame 14.197.xx.


Code	Description	V	A	mm
14.195.60	Dual USB-A plug	12/24	2.1 + 1.0	49x25x51 (depth)
14.195.59 <b>New</b>	Dual Quick Charge USB plug 18W + 18W	12/24	3 + 2	49x25x51 (depth)
14.195.62	USB-A + USB-C plug	12/24	2.4 + 3	49x25x40 (depth)
14.195.61	Dual USB-A plug + 5/30 V voltmeter	12/24	2.1 + 2.1	49x25x51 (depth)



**Marina R toggle switch, watertight**

**IP67** Installation requires a 21.5x36.8-mm rectangular bore. 20 A / 12 V max power. Rigid toggle and LED warning light that lights up the toggle to activate the contact.

Code	Function	V	N. terminals	Toggle
14.296.01	OFF-ON	12/24	3	INCLUDED
14.296.02	OFF-(ON)	12/24	3	INCLUDED
14.296.03*	(ON)-OFF-(ON) for: flaps, trim tabs, gangways, etc.	12/24	6	INCLUDED
14.296.04	ON-OFF-ON for 2 separate circuits (navigation and masthead lights or to switch the bilge pump from manual to automatic mode)	12/24	4	INCLUDED
14.296.05	(ON)-OFF-(ON) for: hydraulic gangways, anchor winches, flaps	12/24	4	INCLUDED
14.296.06	ON-OFF-(ON) for bilge pumps (automatic and manual mode)	12/24	4	INCLUDED
14.296.07*	ON <sup>1</sup> - OFF - ON <sup>1+2</sup> , ON <sup>1</sup> = circuit 1 ON <sup>1+2</sup> = circuit 1+2 Navigation lights for hulls up to 12 m: ON <sup>1</sup> = white 360° ON <sup>1+2</sup> = white 360°+red/green 112°,5	12/24	4	INCLUDED

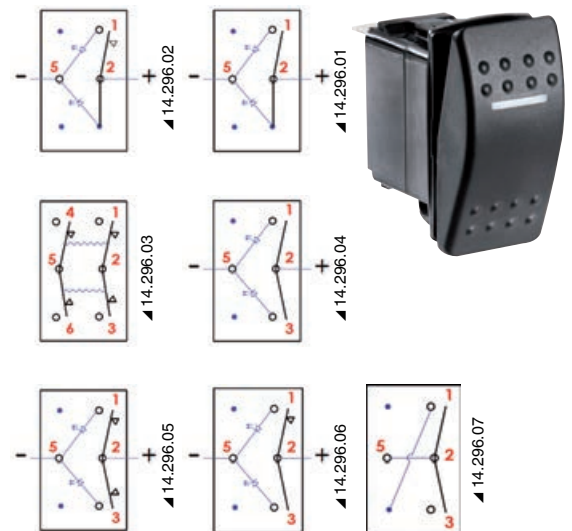

(ON) with spring return.  
\* No LEDs