

## Europump submersible bilge pumps

### Europump II submersible bilge pump

CE certified by RINA in compliance with Law 94/25, directive ISO 8846


Code	Europump model	V	Flow l/min		Current draw A	Max Head m	Base Ø mm	Height mm	Hose adaptor Ø mm
			Max	with 2m head					
16.122.02	550	12	32	25	4	4.50	60	93	19
16.122.05	800	12	51	25	5.5	4.50	88	120	19
16.122.06	1000	12	64	30	5.5	4.50	88	120	29
16.122.07	1000	24	64	30	3.5	4.50	88	120	29
16.122.04	1100	12	60	32	5	4.50	60	107	29
16.122.10	1500	12	96	46	8	3.10	120	150	29
16.122.11	1500	24	96	46	5	3.10	120	150	29
16.122.14	2000	12	128	65	11	3.50	120	150	29
16.122.15	2000	24	128	65	6	3.50	120	150	29
16.122.18	3000	12	192	100	13	6.00	132	180	32
16.122.19	3000	24	192	100	8	6.00	132	180	32



### Europump Next Generation submersible bilge pump

CE-certified in compliance with the ISO 8846/8849 directive.  
Extremely compact in size, fitted with backflow **check valve**.  
Removable hose connector adjustable at 360°.

Code	V	Model	Flow l/min	Current draw A	Head m	Ø-Hose adaptor mm	90° Hose adaptor Ø 29 mm OPTIONAL
16.128.01	12	600	38	2.5	2.5	19/29	16.128.00
16.128.05	12	1100	70	4.0	4	25/29	16.128.00
16.128.06	24	1100	70	2.5	4	25/29	16.128.00

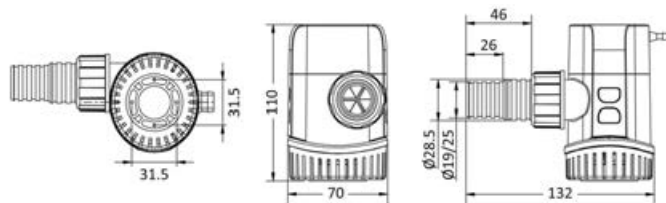

### Europump II automatic bilge pump

Very compact, with built-in electronic level sensor.  
ABS body, stainless steel shaft. Reduced current draw.  
Removable from plug-in base. CE certified by RINA in compliance with Law 94/25, directive ISO 28846/28849.

Code	Type	V	Flow l/min	Current draw A	Head m	Hose adaptor (Ø A) mm
16.124.01	G600	12	38	2.5	2.5	19
16.124.03	G750	12	48	3	3	19
16.124.04	G750-24	24	48	1.6	3	19
16.124.05	G1100	12	70	4.0	3.2	29
16.124.06	G1100-24	24	70	2.0	3.2	29

