


Polis reduced recess fit LED ceiling light

IP66

Traditional round lens dial, polycarbonate frame with mirror-polished stainless steel ring. Satin-finish lens.
Single central LED. Screw mounting.

Type	Recommended switch type	Recommended switch model	Dimmable
A	ON/OFF	Any	No
A	Touch dimmer	14.482.00	Yes
B	ON/OFF	Any	No
B	Switch on momentaneous	14.215.05/06.13/14 or similar	Yes

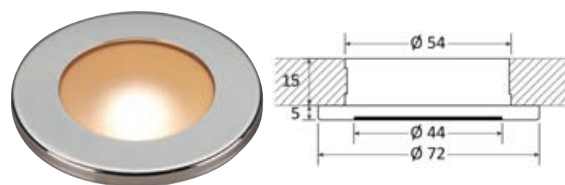


Code	Switch type	Finish	V	W	Switch	Lumen	K	LED beam angle	No of LEDs	Light colour
13.488.01	A	Polycarbonate + steel	12/24	2	No	170	3000	80°	1	☐ White
13.488.02	B	Polycarbonate + steel	12/24	2	No	160+50	3000	80°	1	☒ White + red night light
13.488.11	-	Polycarbonate + steel	12/24	2	Yes, dimmerable touch switch	170	3000	80°	1	☐ White
13.488.12	-	Polycarbonate + steel	12/24	2	Yes, dimmerable touch switch	160+50	3000	80°	1	☒ White + red night light

Polis reduced recess fit LED ceiling light

IP66

Round lens with square dial, polycarbonate frame with mirror-polished stainless steel ring. Satin-finish lens.
Single central LED. Screw mounting.

Type	Recommended switch type	Recommended switch model	Dimmable
A	ON/OFF	Any	No
A	Touch dimmer	14.482.00	Yes
B	ON/OFF	Any	No
B	Momentary on switch	14.215.05/06.13/14 or similar	Yes

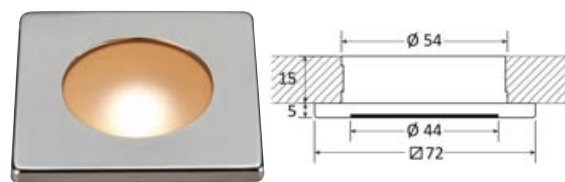


Code	Switch type	Finish	V	W	Switch	Lumen	K	LED beam angle	No of LEDs	Light colour
13.489.01	A	Polycarbonate + steel	12/24	2	No	170	3000	80°	1	☐ White
13.489.02	B	Polycarbonate + steel	12/24	2	No	160+50	3000	80°	1	☒ White + red night light
13.489.11	-	Polycarbonate + steel	12/24	2	Yes, dimmerable touch switch	170	3000	80°	1	☐ White
13.489.12	-	Polycarbonate + steel	12/24	2	Yes, dimmerable touch switch	160+50	3000	80°	1	☒ White + red night light

Bos reduced recess fit LED ceiling light

IP66

Square lens with square dial, polycarbonate frame with mirror-polished stainless steel ring. Satin-finish lens.
Single central LED. Screw mounting (IP66 protection degree) or spring mounting (IP40 protection degree).

Type	Recommended switch type	Recommended switch model	Dimmable
A	ON/OFF	Any	No
A	Touch dimmer	14.482.00	Yes
B	ON/OFF	Any	No
B	Switch on momentaneous	14.215.05/06.13/14; 14.482.01 or similar	Yes

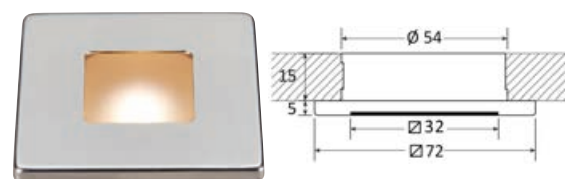

Code	Switch type	Finish	V	W	Switch	Lumen	K	LED beam angle	No of LEDs	Light colour
13.490.01	A	Polycarbonate + steel	12/24	2	No	170	3000	80°	1	☐ White
13.490.02	B	Polycarbonate + steel	12/24	2	No	160+50	3000	80°	1	☒ White + red night light
13.490.11	-	Polycarbonate + steel	12/24	2	Yes, dimmerable touch switch	170	3000	80°	1	☐ White
13.490.12	-	Polycarbonate + steel	12/24	2	Yes, dimmerable touch switch	160+50	3000	80°	1	☒ White + red night light

Merope halogen spotlight for recess mounting

IP30

AISI 304

Glass diffuser, dichroic parabolic reflector.

Code	Finish	V	W	Bulb	Spare bulb	Light colour
13.436.01	mirror-polished	12	20	G4	14.454.12; 14.454.24	☐ white



Syntesis LED ceiling light for recess mounting

IP55

Aluminium body, stainless steel finish ring.

Code	Finish	V	W	lumen	K	LED beam angle	No of LEDs	Light colour
13.449.01	Mirror-polished	12/24	3	70	2900-3200	94°	1	☐ white

