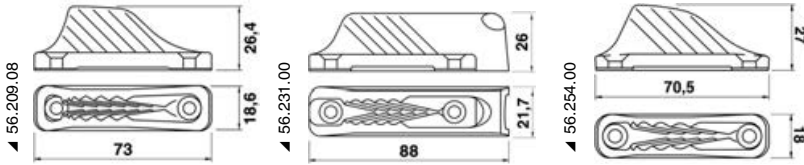


CLAMCLEATS Midi


For sheets up to 8 mm.

Code	For sheets mm	Manufacturer's code	Material	Notes
56.209.08	4/8	(CL209)	nylon	-
56.231.00	4/8	(CL231)	nylon	with U-bolt
56.254.00	4/8	(CL254)	aluminium	-

**CLAMCLEATS Lat**

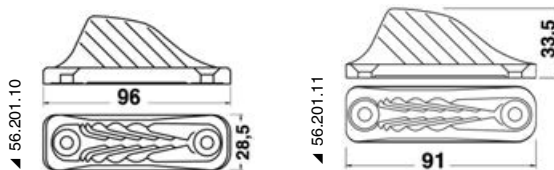
For side fastening. For sheets up to 10 mm.

Code	For sheets mm	Manufacturer's code	Material	Notes
56.206.10	6/10	(CL206)	nylon	right
56.207.10	6/10	(CL207)	nylon	left

**CLAMCLEATS Vertical**

For sheets up to 12 mm.

Code	For sheets mm	Manufacturer's code	Material
56.201.10	6/12	(CL201)	nylon
56.201.11	6/12	(CL219)	aluminium

**CLAMCLEATS Major**

For sheets up to 16 mm.

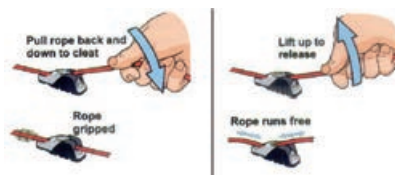
Code	For sheets mm	Manufacturer's code	Material
56.202.16	10/16	(CL205)	nylon

**CLAMCLEATS Autoreleas**Made of aluminium with acetal base; **self-locking** when the load exceeds the maximum allowed; ideal for locking/unlocking the wheel's blade in case of obstacles or burying.

Code	Ropes mm
56.257.00	4/6

**Sheet fairlead for CLAMCLEATS**

56.814.00 It matches 56.203.08; 56.211.08/28; 56.217.00; 56.218.00; 56.236.00. It avoids the sheet to release accidentally but it can also let the sheet glide freely.

**Alloy cam cleat on ball bearings**56.253.00 Made of **anodized aluminium**, fitted with jaws mounted on **Delrin balls**. 64 x 30 mm base, for 5- to 12-mm lines.