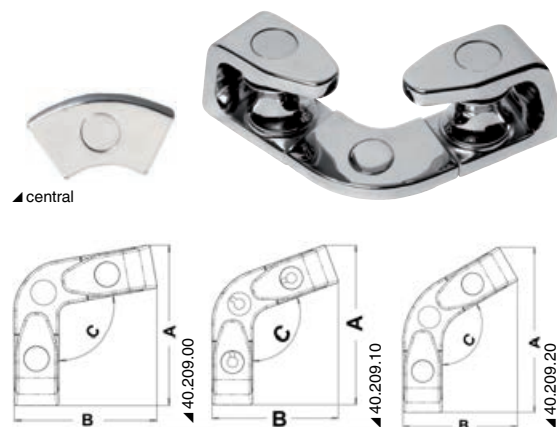


**Corner roller fairlead**

AISI 316 Mirror-polished finish

Code	Description	Stud Ø mm	Length mm	For rope Ø mm	A mm	B mm	Height mm	Angle C
40.209.00	Angled fairlead with rollers with hidden studs	9	120	16/22	140	124	56	100°
40.209.10	Angled fairlead with rollers with hidden studs	9	120	16/22	152	120	56	110°
40.209.20	Angled fairlead with rollers with hidden studs	9	120	16/22	163	113	56	120°
40.209.25	Only RIGHT/LEFT terminal	-	-	-	-	-	-	-
40.209.26	Only central 100°	-	-	-	-	-	-	-
40.209.27	Only central 110°	-	-	-	-	-	-	-
40.209.28	Only central 120°	-	-	-	-	-	-	-

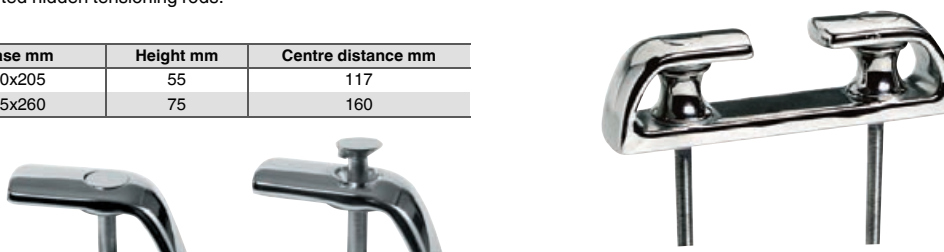
OSCOLATI

**Roller fairlead**

AISI 316 Fitted with special patented hidden tensioning rods.

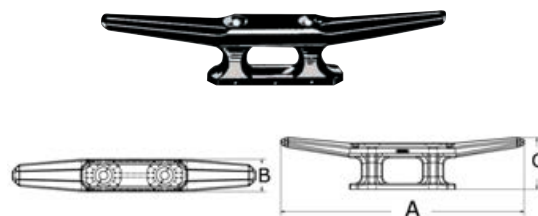
Code	For rope Ø mm	Base mm	Height mm	Centre distance mm
40.205.00	16/22	40x205	55	117
40.206.00	24/32	45x260	75	160

OSCOLATI

**Plastic cleats****Belaying cleat**

Made of nylon, very sturdy.

White	Black	↔ AxBxC mm	Centre distance mm	Ø bore mm
40.055.31	40.055.11	110x15x22.5	28	5.1
40.055.34	40.055.14	144x19.5x27.5	34	5.3
40.055.38	40.055.18	175x23x25	44	6.1
40.055.32	40.055.22	208x27x42	52	8.1

**Jamming cleat**

Made of black nylon.

Code	For sheets	Length mm
40.057.00	from 6 to 12 mm	155

