


Ambient strip lights, flexible version

Self-adhesive, waterproof, equipped with end micro-connector allowing to connect them in series and with connection cable with micro-connector..

Code	V	W	Absorption mA	Lumen	K	LED beam angle	No of LEDs	LED colour	Length mm	Section mm
13.834.01	12	1.4	70	100	3000	120°	12 SMD	White	300	10x3
13.834.03	12	1.4	70	30	-	120°	12 SMD	Blue	300	10x3
13.834.05	12	1.8	90	165	3000	120°	15 SMD	White	500	10x3
13.834.06	12	1.8	90	50	-	120°	15 SMD	Blue	500	10x3
13.834.08	12	3.6	150	330	3000	120°	30 SMD	White	1000	10x3
13.834.09	12	3.6	150	100	-	120°	30 SMD	Blue	1000	10x3
13.834.11	12	5.4	200	500	3000	120°	45 SMD	White	1500	10x3
13.834.12	12	5.4	200	150	-	120°	45 SMD	Blue	1500	10x3

"Superbright" LED light

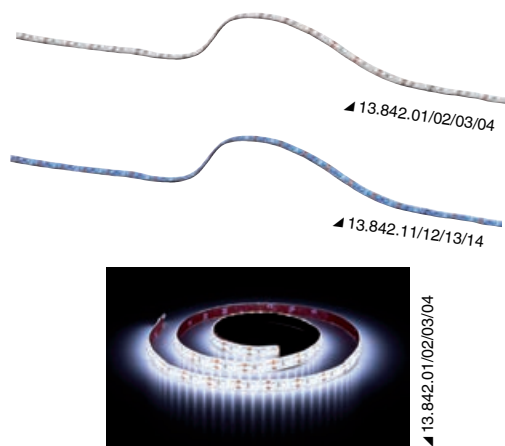

Flexible LED light strip

IP65

Fitted with 30-cm bipolar end cord. They can be cut every 2.5 cm (12V) or 5 cm (24V). Self-adhesive with 3M original tape.

Code	V	W	Lumen/ m	K	LED beam angle	No. of LEDs	LED colour	Length mm	Section mm
13.842.01	12	12	1000	3000	120°	120	Warm white	1000	10x4
13.842.02	12	24	1000	3000	120°	240	Warm white	2000	10x4
13.842.03	24	12	1000	3000	120°	120	Warm white	1000	10x4
13.842.04	24	24	1000	3000	120°	240	Warm white	2000	10x4
13.842.11	12	12	300	-	120°	120	Blue	1000	10x4
13.842.12	12	24	300	-	120°	240	Blue	2000	10x4
13.842.13	24	12	300	-	120°	120	Blue	1000	10x4
13.842.14	24	24	300	-	120°	240	Blue	2000	10x4



13.701.12/24




13.702.12/24



13.710.03



13.710.04



Neon Light flexible LED strip, even light

IP68

2-m bars. They can be very easily **cut to measure** keeping into account that the master contact is placed every 50 cm (marked on the bar).

Yet the bar can also be cut every **10 or 5 cm** (thus avoiding waste) being extremely careful in the process.

This technology delivers **even and diffused light**.

For interior and exterior applications.

Code	V	W/m	Lumen	K	LED beam angle	No of LEDs/m	LED colour	Length m	Section mm
13.701.12	12	10	380	3000	120°	120	Warm white	2	8x16
13.701.24	24	10	380	3000	120°	120	Warm white	2	8x16
13.702.12	12	10	100	-	120°	120	Blue	2	8x16
13.702.24	24	10	100	-	120°	120	Blue	2	8x16



13.710.01 Electric cord fitted with 1 junction.

13.710.02 Electric cord to connect 2 bars fitted with 2 junctions.

13.710.03 Aluminium clip to fasten 2 bars.

13.710.04 End cap.

